

**This Page Is Inserted by IFW Operations  
and is not a part of the Official Record**

## **BEST AVAILABLE IMAGES**

**Defective images within this document are accurate representations of the original documents submitted by the applicant.**

**Defects in the images may include (but are not limited to):**

- **BLACK BORDERS**
- **TEXT CUT OFF AT TOP, BOTTOM OR SIDES**
- **FADED TEXT**
- **ILLEGIBLE TEXT**
- **SKEWED/SLANTED IMAGES**
- **COLORED PHOTOS**
- **BLACK OR VERY BLACK AND WHITE DARK PHOTOS**
- **GRAY SCALE DOCUMENTS**

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problem Mailbox.**

## PATENT SPECIFICATION

(11) 1 454 324

1 454 324

- (21) Application No. 44065/74 (22) Filed 11 Oct. 1974  
 (31) Convention Application No. 818898  
 (32) Filed 14 Aug. 1974 in  
 (33) Belgium (BE)  
 (44) Complete Specification published 3 Nov. 1976  
 (51) INT. CL.<sup>2</sup> C10B 57/20  
 (52) Index at acceptance  
 C5E D19  
 (72) Inventor PIERRE LEDENT



(54) RECOVERING COMBUSTIBLE GASES FROM  
 UNDERGROUND DEPOSITS OF COAL OR  
 BITUMINOUS SHALE

(71) We, INSTITUT NATIONAL  
 DES INDUSTRIES EXTRACTIVES,  
 a Belgian Body Corporate, of Bois du  
 Val Benoit, rue du Chéra, 4000 Liège,  
 Belgium, do hereby declare the invention,  
 for which we pray that a patent may be  
 granted to us, and the method by which it is  
 to be performed to be particularly  
 described in and by the following  
 statement:—

The present invention relates to a process  
 for recovering combustible gases from an  
 underground deposit of coal or bituminous  
 shale.

Traditional coal or shale mining  
 operations have involved the sinking of  
 access shafts and galleries from the shafts to  
 the coal or shale face to allow access by  
 workmen and removal of the products.  
 Support must be provided at the face of the  
 mine, and must be moved gradually as the  
 mining operations progress. These methods  
 are labour-intensive and have become  
 unprofitable in many countries, so that  
 large deposits of coal are no longer being  
 worked.

In open-cast mining a layer of topsoil or  
 rock is excavated to expose a deposit of  
 coal or shale which can then be worked, for  
 example, by mechanical shovels, dredger  
 excavators or bucket-ladder dredgers.  
 However, this method of working is  
 appropriate only for a limited number of  
 deposits occurring at relatively shallow  
 depths.

For deep deposits, or where the potential  
 yield of coal is insufficient to justify the  
 excavation operations required for open  
 cast mining, it has been proposed to convert  
 the coal into a combustible gas *in situ*. The  
 methods so far adopted have involved the  
 drilling of a circulation path for air and gas  
 comprising at least one air inlet bore, at  
 least one gas outlet bore and at least one  
 gallery connecting them. The circulation  
 path has to be provided before the start of

the gasification operation. In spite of a good  
 deal of experimental work, this method has  
 not met with general success on account of  
 three major drawbacks:

(a) it has proved to be impossible to  
 control the gasification process and to  
 prevent air and gas escaping from the  
 circulation path into the waste material  
 produced during working;

(b) owing to lack of control of the  
 gasification process carbon was converted  
 to carbon dioxide rather than carbon  
 monoxide; and

(c) it has proved impossible to carry out  
 any rational working of a deposit in the  
 form of stratified layers, and as a result in  
 the majority of experiments only a small  
 portion of the deposit has been worked.

Several methods which attempt to  
 overcome these difficulties have been  
 devised. It has been proposed to perform  
 the gasification by a cyclic process  
 involving successively injecting under  
 pressure air or a reactive gas such as  
 hydrogen, allowing the gasification to  
 proceed, and then allowing the gases  
 produced to expand. A method for  
 producing an extensive underground gas  
 generating system in bituminous shale has  
 been proposed using a nuclear explosion to  
 supply the heat required to distil the  
 bitumen permeating the shale and to  
 provide fissures through which the gaseous  
 distillate can pass. However, this method  
 has not been tested, and its use is likely to  
 be limited to desert zones because of the  
 risk of contamination of phreatic strata with  
 the radio-active byproducts of the nuclear  
 reaction.

The present invention provides a process  
 for recovering combustible gases from an  
 underground deposit of coal or bituminous  
 shale with overlying rock, in which coal or  
 bituminous shale in a lower part of the  
 deposit is thermally gasified, and the  
 combustible gases thus produced are

50

55

60

65

70

75

80

85

90

recovered, whereby the overlying rock is heated, expanded and fissured to desorb and release combustible constituents therein which are recovered separately from but simultaneously with the said combustible gases. The process of the invention enables deposits of coal or bituminous schists at medium or great depths to be worked. It enables an underground gas-generating system to be produced without using a nuclear explosion and enables structures to be worked in which two or more superimposed layers of coal or bituminous shale are separated by intermediate layers of rock.

Gas of relatively low calorific value may be withdrawn from the thermal gasification zone in a lower strati-graphical level of the coal or shale deposit and may be used to produce electrical energy by the use of regenerative boilers and gas turbines. In an upper strati-graphical level of the deposit the rocks are heated, expanded and fractured so that fire-damp and other volatile materials present are desorbed and/or distilled and can be withdrawn as a gas of high calorific value. This gas can be purified and used as a substitute for natural gas or as a feed gas for chemical synthesis.

The process of the invention is particularly useful for the working of deposits of coal or bituminous shale which have not previously been worked. One or more gasification bores are sunk to the lower strati-graphical level of the deposit. A gasification chamber having a volume at least equal to the volume of the bore is formed surrounding the or each bore at the lower strati-graphical level. The gasification may be carried out by repeatedly injecting air or a reactive gas such as hydrogen under pressure into the gasification chamber or chambers, allowing the gasification reaction to proceed for the required time, and expanding and withdrawing the low calorific value gas produced. At the end of the injection step, the pressure in the gasification zone may be of the order of 40 to 100 atmospheres or even, if desired, above these values.

The layers of rock which may occur between various layers of coal or shale become heated to a high temperature by heat evolved during the gasification reaction, and act as a reservoir for heat. The heat retained in these rocks may be used to produce steam (which may be reacted with coal or bitumen to produce water gas), or, after the gasification operations have been terminated, for producing hot water which may be supplied to an electrical power plant or to an urban central heating system.

Figure 1 is a vertical sectional view through a coal-bearing deposit being

worked according to the process of the invention.

A deposit of coal exists in the form of layers of coal separated by layers of rock. The deposit extends from an upper strati-graphical level  $N_2$  to a lower strati-graphical level  $N_1$ . One or more gasification bores  $S_1$  extend to the level  $N_1$ . One or more recovery bores  $S_2$  extend to the level  $N_2$ . If the layer of rock above the deposit is highly porous and permits circulation and withdrawal of gases within it, the recovery bores need not be drilled further than this layer. If no such layer exists, it can be created artificially by the "fracking" method known in the oil-drilling industry. This method consists of injecting water to which sand and wetting agents have been added under a pressure which considerably exceeds the average pressure exerted on the layer by the weight of the overlying strata of rock.

If it is desired to obtain the maximum yield of gas of high calorific value, one or more supplementary bores  $S_3$  may be drilled to intermediate strati-graphical levels. If required, a fracking operation is carried out for each supplementary bore.

The gasification bore or bores are desirably drilled down to a layer containing a significant amount of coal. At the base of the or each bore a gasification chamber  $C$  is provided, the volume of which is equal to or preferably considerably greater than the volume of the bore. This chamber may be formed by any suitable method, such as fracking, combustion, explosive pocket formation or hydraulic underwashing and pumping. In a layer of coal containing fire-damp (an "immediate release" layer) the combustion chamber may be formed by release of the pressure on the layer, the evolution of fire-damp being sufficient to cause fracturing.

The gasification and the recovery bores will each be lined with gas-tight metal tubes. For recovery bores, ordinary steel tubing may be used. For gasification bores at least the lower portion thereof between the strati-graphical levels  $N_1$  and  $N_2$  are lined with a refractory steel containing a high proportion of chromium and nickel and able to resist temperatures of the order of 1200—1300°C. Particular care is required to ensure a gas-tight seal between the ground and the upper part of the tubing of the gasification bore or bores to prevent escape of high-pressure gas. Allowance must also be made for thermal expansion and contraction movements of the tubing as a result of variation in temperature during various stages of the gasification process.

The required gas-tight seal may be formed, for example, using a layer of refractory cement having a low coefficient

of expansion of the kind which is used in the building of chimneys for industrial furnaces. This seal is slightly above the level  $N_2$ , and over it is a great depth of tamping. The tamping is desirably a thermoplastic material which can soften and allow expansion or contraction of the tubing while at the same time preventing any escape of gas. Suitable materials include, for example, asphalt, tar-bitumen, or a synthetic resin. At the top of the bore  $S_1$  is an inlet tube having a valve A for injection of an oxygen-containing gas supplied under pressure from a compressor (not shown), and an outlet tube containing a valve B for withdrawing gaseous product, which is passed to a purification plant and then to a turbine (not shown). The gasification tube or tubes  $S_1$  are advantageously provided with a fine internal tube (not shown) having means, for example one or more thermocouples, for measuring the temperature in the gasification zone and means for injecting water, oil, a combustible gas or oxygen in accordance with the temperature measurement to adjust the temperature in the gasification zone.

To start the gasification operation, a layer of coal or shale in the combustion chamber adjacent the bore  $S_1$  is ignited. Various ignition devices may be used, for example electrically induced combustion of a charge of black powder or fracture of an incendiary capsule containing phosphorus. After ignition, the bore  $S_1$  is closed, and progressively pressurised by compressed air (enriched, if desired, with oxygen) introduced via valve A. When the pressure has reached the desired value, which will normally be the maximum attainable value of which the compression plant is capable, valve A is closed, and the bore  $S_1$  is maintained hermetically sealed for a suitable period to allow homogenisation of the gaseous masses injected into the gasification chamber. After this period of "digestion", the combustible gas produced is withdrawn and passed via valve B to the purification device for removal of dust and other harmful impurities and then to the expansion turbine. A second gasification cycle is initiated by introduction of a further quantity of air or a reactive gas, and the gasification process is continuously carried out with alternating injection of air or reactive gas and withdrawal of combustible gas.

In each cycle part of the coal is converted into gas, so that there is a progressive increase in the volume of the gasification chamber at the base of the bore  $S_1$ . The chamber therefore constitutes an empty space of gradually increasing volume, whose expansion causes a subsidence of the

layers of sedimentary rock immediately above. The gasification chamber develops a naturally vaulted dome-shaped roof. When the gasification chamber reaches a sufficient size, the layers of rock which form its roof disintegrate and collapse, so that blocks of coal or rock accumulate on the floor. Fissures develop in rock and coal layers above the gasification chamber, and release of pressure on the overlying coal layers gives rise to a significant release of fire-damp by desorption from all the major and minor veins of coal in the massif of the coalfield.

In the process of the invention, this collapse phenomenon is helpful rather than a disadvantage. The blocks of coal and rock on the floor of the gasification chamber are highly permeable and do not substantially reduce its useable volume which is constituted by the interstices between the blocks. In previously known processes the collapse phenomenon resulted in inefficient use of air or reactive gas because of formation of alternative channels through cold zones away from the gasification chamber. In the present process these difficulties are avoided because of two factors:

(i) in virgin deposits the coal-bearing strata are highly impermeable to gas, and their impermeability is increased by compression of the domed roof of the gasification chamber, which behaves as a tight envelope capable of retaining the gas produced under a high pressure;



(ii) in the interior of the gasification chamber there is highly efficient heat transfer between the gases and the collapsed rocks partly because of the high pressure therein and partly because of the cyclic nature of the gasification process which gives rise to repeated contact between the rocks and the hot gases during each period of compression and each period in which gas is withdrawn.

The whole gasification chamber becomes heated to a high temperature as gasification proceeds, and as the chamber expands, small veins of coal situated in the roof are ignited, and subsequently the next stratigraphical layer of coal is ignited, so that the gasification reaction can spread from layer to layer.

A heap of incombustible rocks accumulates on the floor near the foot of the gasification bore and acts to some extent as a heat exchanger. It preheats the air or reactive gas during the periods of injection and cools the combustible gas being withdrawn. This heat-exchange effect enables a very high temperature to be maintained in the gasification chamber and a lower temperature, which is more readily

withstood by the metal tubing, in the vicinity of the gasification bore.

- For smooth control of the process it is desirable to provide means for controlling the temperature all along the gasification bore, and means for increasing or decreasing the temperature. There is therefore provided in the gasification bore a tube of small diameter bearing a plurality of thermocouples fixed at different levels for measuring the temperatures prevailing between the strati-graphical levels  $N_1$  and  $N_2$ . If the temperature rises too high, water can be injected through the small tube to lower the temperature by evaporation and by endothermic formation of water gas by the following reactions:



- If the temperature is too low, it may be increased by injection of oxygen. Oil or a combustible gas may be injected if analysis of the product gas reveals a temporary deficiency of carbonaceous material. In general the maximum temperature along the bore should be maintained at a value of about  $1000^\circ\text{C}$  which is convenient for carrying out the gasification reaction.
- The expansion of the gasification chamber is accompanied by a progressive expansion of the zone of collapsed rock and by a progressive rise in the level of the domed roof. In Figure 1 the symbols  $V_1$ ,  $V_2$  and  $V_3$  illustrate three successive positions of the roof as the reaction proceeds. As soon as the roof reaches a layer of permeable rocks or a fracking zone adjacent a recovery bore significant quantities of gas can be withdrawn from the bore. For recovery of the maximum quantity of gas of high calorific value a counter-pressure is maintained within the supplementary bore  $S_2$  so that the fire-damp and distillation products originating from the upper strati-graphical levels of the deposit can be withdrawn from  $S_2$  without too much gas of low calorific value rising from the gasification chamber.
- The heat accumulated in the rocks in the lower strati-graphical levels adjacent to the gasification zone may advantageously be used to increase the amount of gas of high calorific value recovered. Thus, when the rocks have reached a sufficiently high temperature, injection of air or reactive gas can be discontinued temporarily and a cycle in which water or steam is injected may be interposed between two cycles of gasification with air. Contact with high temperature rock produces highly superheated steam which reacts with white hot coal to produce water gas and methane.

If the pressure in the bore  $S_2$  is lowered, water gas, methane and excess steam penetrate the layers of rock above the gasification chamber and assist in the degassing and distillation of volatile materials from overlying coal strata.

The bore  $S_2$  can also be used to prevent the infiltration of high-pressure gas from the gasification chamber into the overlying coal or rock strata, and the bottom of the bore is maintained at a pressure equal to or less than atmospheric pressure for this purpose.

The gasification operation is continued until all the accessible combustible material between the levels  $N_1$  and  $N_2$  has been distilled or converted into low calorific value gas. A period of several months, or even years, may be required. At the end of the operation the gasification chamber is filled with caved-in rocks heated to a high temperature. In the final stage of working it is desirable to recover the heat from these rocks by injecting cold water through the bore  $S_1$  and by recovering steam and hot water through the bore  $S_2$ .

Substantial amounts of energy can be recovered by the present process. For example, the gasification chamber may at the end of gasification be of a generally ellipsoidal shape; it may reach a height of 300 metres and extend horizontally for 200 metres. The volume of the chamber may reach 6.3 million cubic metres, corresponding to about 15 million tons of rock. The quantity of coal initially present in this volume of rock may be greater than 1 million tons, and the amount of energy available for recovery is of the order of  $7 \times 10^{12}$  KCal. 20 to 25% of this energy may be recovered in the form of gases of high calorific value, 50 to 60% may be recovered in the form of low calorific value gases at a high pressure, and 20 to 25% is in the form of heat imparted to the rocks and may be recovered as hot water or steam.

The deposit will normally be worked in practice using a number of gasification bores. For most efficient use of the compression and expansion turbines the gasification bores are divided into two sets whose gasification cycles are out of phase so that an injection period in one set of bores corresponds to a withdrawal period in a second set of bores. The sets of gasification bores may be connected in parallel and may be drilled sufficiently close together that during working the gasification chambers of adjacent bores coalesce.

Figure 2 is a plan view of a concession showing the general arrangement of the gasification bores.

A line of bores consisting of a set  $E_1$  and a set  $W_1$  within a concession ABCD are each

- connected in parallel by pipelines which extend to a central station G situated in the approximate centre of the coal deposit. The approximate extent of the gasification zone surrounding each bore is indicated by broken lines. The central station includes means for recovering gas of high calorific value, a compressor for air or reactive gas, and an expansion turbine for the high pressure low-calorific value gas recovered. A second line of bores is in preparation and comprises sets of bores  $E_2$  and  $W_2$  situated at a distance from the bores  $E_1$  and  $W_1$  such that a protective zone exists between them.
- 15 WHAT WE CLAIM IS:—
1. A process for recovering combustible gases from an underground deposit of coal or bituminous shale with overlying rock, in which coal or bituminous shale in a lower part of the deposit is thermally gasified and the combustible gases thus produced are recovered, whereby the overlying rock is heated, expanded and fissured to desorb and release combustible constituents therein which are recovered separately from but simultaneously with the said combustible gases.
2. A process according to claim 1, wherein one or more gasification chambers are provided in the lower part.
3. A process according to claim 2, wherein the gasification is carried out by repeatedly injecting air or a reactive gas under pressure into the gasification chamber or chambers and subsequently withdrawing combustible gas therefrom.
4. A process according to claim 3, wherein water or steam is injected between injections of air or reactive gas.
5. A process according to claim 3 or claim 4, wherein air or reactive gas is injected until the pressure reaches a value in the range of 40 to 100 atmospheres.
6. A process according to any preceding claim, wherein one or more gasification bores are sunk to a lower strati-graphical level of the deposit, one or more gasification chambers having a volume equal to or greater than the volume of the
- or each gasification bore is or are formed in said level, and one or more recovery bores are sunk to an upper strati-graphical level of the deposit.
7. A process according to claim 6, wherein one or more supplementary bores are sunk to an intermediate level of the deposit.
8. A process according to claim 6 or 7, wherein a porous zone is formed by a fracking operation at one or more of the levels to which the recovery or supplementary bore or bores has or have been sunk.
9. A process according to any of claims 2 to 8, wherein the gasification chamber is formed by combustion, fracking, explosive pocket formation or hydraulic underwashing.
10. A process according to any of claims 6 to 9, wherein the bottom of the or each recovery bore is maintained at or below the atmospheric pressure.
11. A process according to any of claims 6 to 10, wherein a fine tube is introduced into the or each gasification bore, the tube having means for measuring the temperature in the gasification zone and means for injecting water, oil, combustible gas or oxygen in accordance with the temperature measurement to adjust the temperature in the gasification zone.
12. A process according to any preceding claim, wherein air or a reactive gas is introduced into a first gasification bore or set of gasification bores and combustible gas is simultaneously withdrawn from a second gasification bore or set of gasification bores.
13. A process according to claim 1, substantially as hereinbefore described with reference to or as illustrated in Figures 1 and 2 of the accompanying drawings.
- MARKS & CLERK,  
Chartered Patent Agents,  
57—60 Lincoln's Inn Fields,  
London, WC2A 3LS,  
Agents for the Applicants.

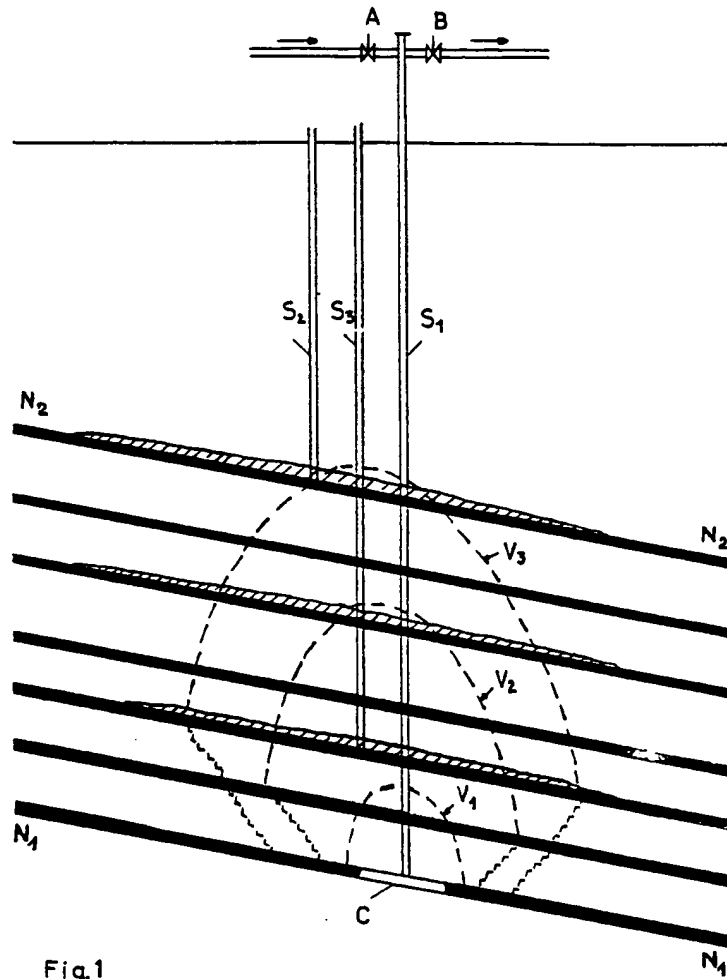


Fig.1

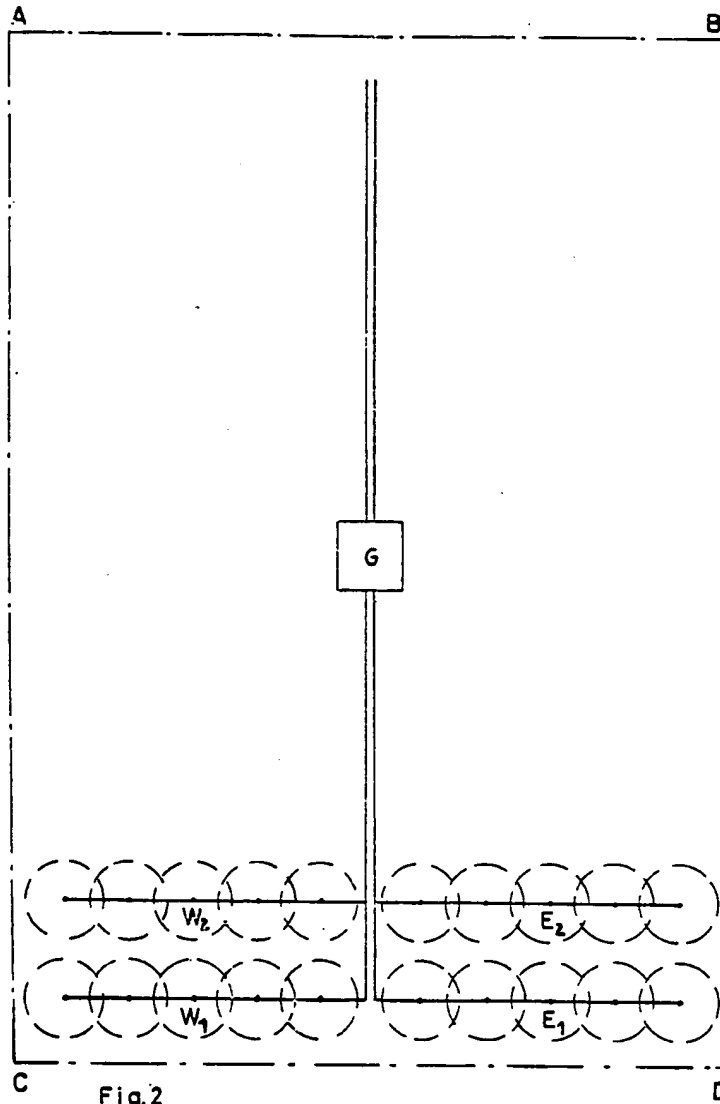


Fig. 2